



90015901 Pendant

220-240V AC 50/60Hz

E27 Max. 60 W

ta=25°C



Assembly and Safety Instructions

Turn off mains power to install this fitting

Unpack the shade and suspension set components.

A: Attach the bracket (6) to ceiling with screws provided. If the ceiling is concrete, drill holes and insert the supplied plastic plugs then screw on the metal bracket

B: Pass the cable up through the cover (3) plate and pipes so that the cable exits the ceiling canopy.
Screw the pipes together.

C: Pass cable wire through bracket and attach to household wiring with the insulator connection block. (7)
Position canopy on ceiling and attach retaining screws. (5)

D: Attach the shade and secure with the shade retaining ring on the lamp holder Insert the bulb

Maintenance and Care

- Never tamper with lamp holder or electrical parts
- Allow bulb to cool before replacement
- Clean with a dry soft cloth. Glass can be cleaned with warm soapy water and towel dry
- If the external flexible cable of the lamp is damaged, it shall be exclusively replaced by a qualified person.

**THIS CEILING LIGHT SHOULD BE INSTALLED BY A
CERTIFIED ELECTRICAL CONTRACTOR**

E27 BULB


BULB WATTAGE FOR THIS LAMP

60 WATT MAX



Parts List

- 1: GLASS SHADE
- 2: LAMP HOLDER and SHADE RING
- 3: PIPE ASSEMBLY
- 4: CEILING CANOPY
- 5: FIXING BRACKET
- 6: WIRE CONNECTOR BLOCK

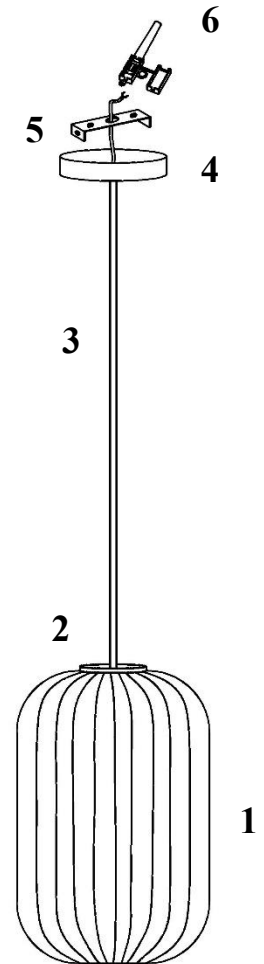

220 –240V AC